

UTILITY TRAILER SPEC SHEET

FULL SPECIFICATION

SINGLE AXLE 3K (UTH)

STANDARD FEATURES

2,990 lb. G.V.W.R.

3,500 lb. x 1 G.A.W.R.

2.5" X 2.5" 1/4" Angle Frame

2.5" Angle Crossmembers 24" OC

Safety Chains

1 - 7,000lbs. Jack

1 - E-Z lube Axle

1 Idler 3,500lbs

4 Leaf Double-eye Spring Suspension

2 15" Steel Wheels

2 - ST205/75R15 Radial Tires

3" Channel Tongue

60" or 77" or 82" Wide Deck

Stake Pockets

2" Ball Coupler

4' Fold-in Gate

9" x 32" Smooth Fenders

2" Treated Pine Lumber Deck

DOT Approved LED Lights

7 Way Wiring Harness

Sand Blasted & Powder Coated

ADDITIONAL OPTIONS

5' slide-in ramps

SIZE OPTIONS

5′X8′


5′X14′

6.5′X8′

6.5'X14'

7′X8′

7′X14′

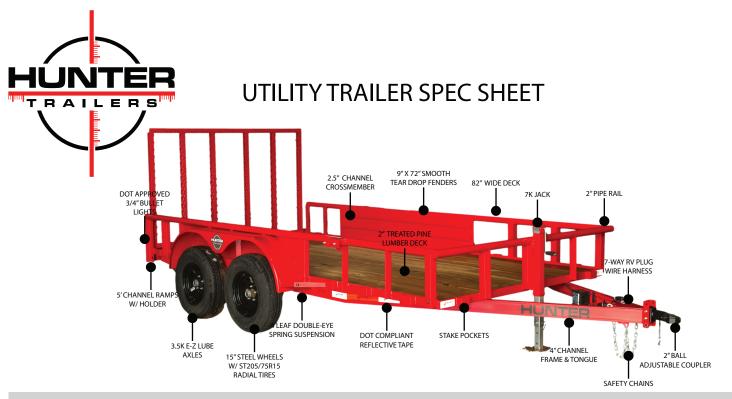

FULL SPECIFICATION

TANDEM AXLE 7K (UTH)

STA	N		١R	SD.	FF.	ΔТ	U	RFS
ノバ		-	\ I	10		· \ I	\mathbf{v}	\LJ

ADDITIONAL OPTIONS

7,000 lb. G.V.W.R.

5' slide-in ramps

3,500 lb. x 2 G.A.W.R.

•

2.5" X 2.5" 1/4" Angle

2.5" Angle Crossmembers 24" OC

Safety Chains

1 - 7,000lbs. Jack

2 - E-Z lube Axles, (1 Idler 1 Brake) 3,500lbs

4 Leaf Double-eye Spring Suspension

4 15" Steel Wheels SIZE OPTIONS

4 - ST205/75R15 Radial Tires 7′X12′

4" Channel Tongue 7'X14'

82" Wide Deck 7'X16'

Stake Pockets 7′X18′

Electric Breakaway Kit w/ Charger 7′X20′

2" Ball Coupler 7'X22'

5' Slide-in Ramps

9" x 72" Smooth Tear Drop Fenders

2" Treated Pine Lumber Deck

DOT Approved LED Lights

7 Way Wiring Harness

Sand Blasted & Powder Coated



UTILITY TRAILER SPEC SHEET

FULL SPECIFICATION

MD TANDEM AXLE 10K (UTH)

STANDARD FEATURES

ADDITIONAL OPTIONS

9,990 lb. G.V.W.R. 5' slide-in ramps

5,200 lb. x 2 G.A.W.R.

3" C-Channel crossmembers

5" C-Channel Frame & Tongue

Safety Chains

1 - 10,000lbs. Jack

2 - E-Z Lube 5,200lbs. Brake Axles

5 Leaf Slipper Spring Suspension

4 16" Steel Wheels

4 - ST235/80R16 Radial Tires 7′X12′

82+" Wide Deck 7′X14′

Stake Pockets 7'X16'

Electric Breakaway Kit w/ Charger

2 5/16" Ball Coupler

9" x 72" Diamond Plate Fenders

2" Treated Pine Lumber Deck

DOT Approved LED Lights

7 Way Wiring Harness

5' Slide-in Ramps

Sand Blasted & Powder Coated

SIZE OPTIONS

7′X18′

7'X20'

7′X22′



UTILITY TRAILER SPEC SHEET

FULL SPECIFICATION

HD TANDEM AXLE 14K (UTH)

STANDARD FEATURES

ADDITIONAL OPTIONS

14,000 lb. G.V.W.R. 5' slide-in ramps

7,000 lb. x 2 G.A.W.R.

3" C-Channel crossmembers

6" C-Channel Frame & Tongue

Safety Chains

1 - 10,000lbs. Jack

2 - E-Z Lube 7,000lbs. Brake Axles

6 Leaf Slipper Spring Suspension

4 16" Steel Wheels

4 - ST235/80R16 Radial Tires 82+" Wide Deck

Stake Pockets

Electric Breakaway Kit w/ Charger

2 5/16" Ball Coupler 7'X20'

5' Slide-in Ramps 7′X22′

9" x 72" Diamond Plate Fenders

2" Treated Pine Lumber Deck

DOT Approved LED Lights

7 Way Wiring Harness

Sand Blasted & Powder Coated

SIZE OPTIONS

7′X12′

7′X14′

7'X16'

7′X18′